




2024 STORM SAN MARINO OPEN



DISTANCE:	47 FEET	VOLUME:	31.145 mL
RATIO:	2.40:1	FORWARD:	13.55 mL
DROP BRUSH:	45 FEET	REVERSE:	17.595 mL
TANKS:	FIRE & ICE	PUMP:	MULTI

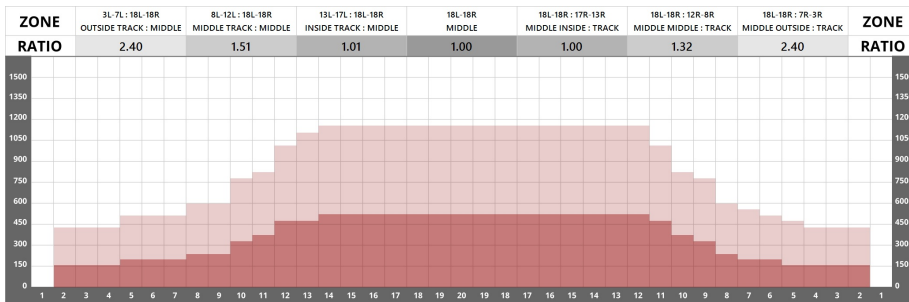

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	2	40	18	4	B - ICE	0 → 3	2,960
2	5L	6R	1	40	18	4	B - ICE	3 → 5	1,200
3	8L	8R	1	40	18	4	B - ICE	5 → 8	1,000
4	2L	2R	2	40	18	3	A - FIRE	8 → 13	2,960
5	10L	9R	2	45	18	3	A - FIRE	13 → 18	1,980
6	11L	10R	1	45	18	3	A - FIRE	18 → 20	900
7	12L	11R	2	50	18	3	A - FIRE	20 → 25	1,800
8	14L	12R	1	50	22	3	A - FIRE	25 → 28	750
9	2L	2R	0	50	22	3	A - FIRE	28 → 32	0
10	2L	2R	0	50	26	3	A - FIRE	32 → 47	0

REVERSE LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	45	26	3	A - FIRE	45 → 43	0
2	13L	12R	2	45	22	3	A - FIRE	43 → 37	1,440
3	12L	11R	1	45	18	3	A - FIRE	37 → 34	810
4	2L	2R	2	45	18	3	A - FIRE	34 → 29	3,330
5	12L	11R	1	45	18	3	B - ICE	29 → 27	810
6	10L	9R	2	45	18	3	B - ICE	27 → 22	1,980
7	8L	7R	1	45	18	3	B - ICE	22 → 19	1,170
8	5L	5R	1	45	18	3	B - ICE	19 → 17	1,395
9	2L	2R	4	45	14	3	B - ICE	17 → 9	6,660
10	2L	2R	0	45	14	3	B - ICE	9 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features



Created Jun 25, 2024

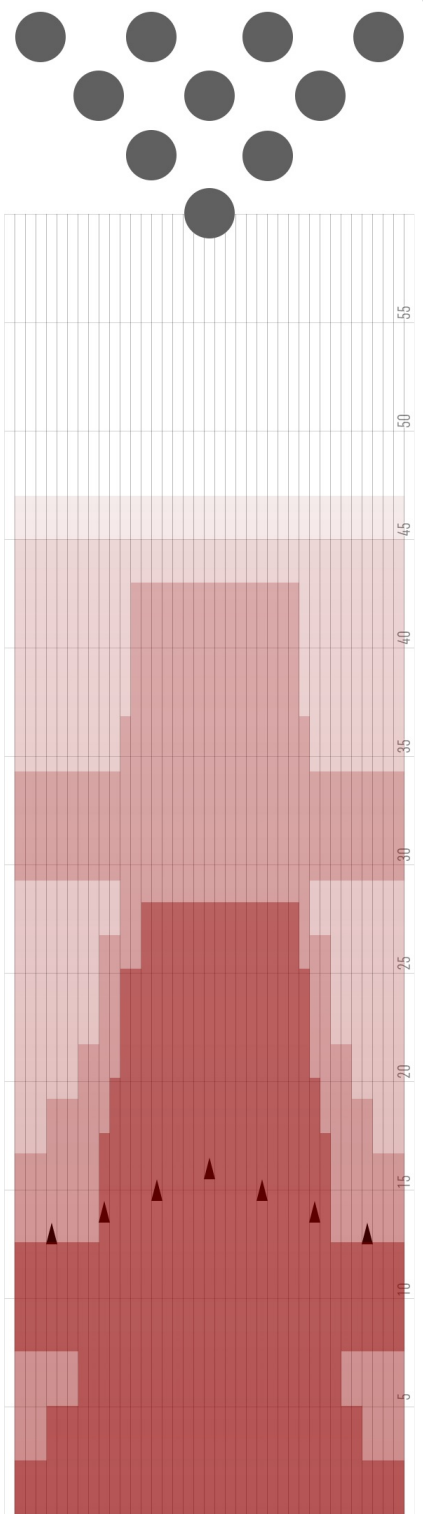

SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

