





2022 U.S. OPEN PATTERN PTQ

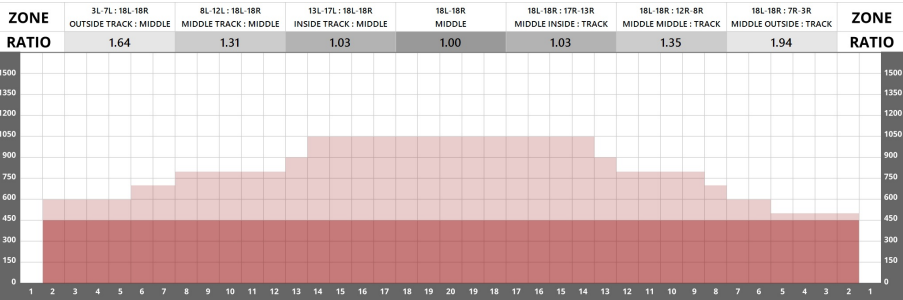

DISTANCE:	40 FEET	VOLUME:	30.35 mL
RATIO:	1.94:1	FORWARD:	16.65 mL
DROP BRUSH:	35 FEET	REVERSE:	13.7 mL
TANKS: NAVIGATE & CURRENT		PUMP:	50µL

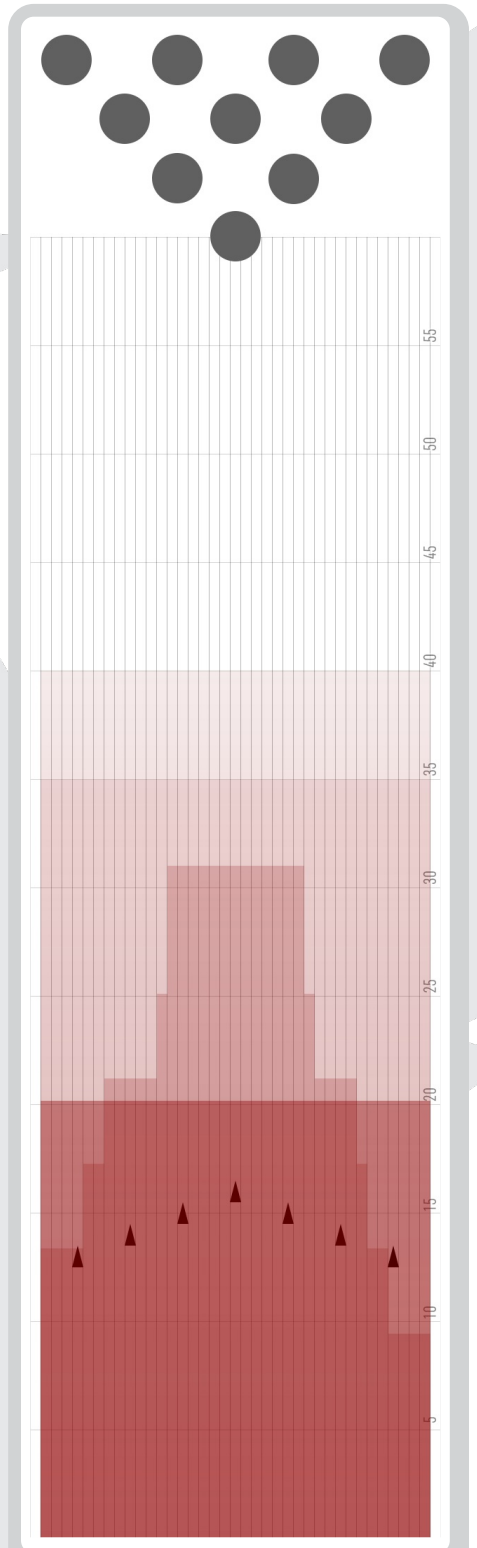

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	9	50	18	3	B - Current	0 → 20	16,650
2	2L	2R	0	50	18	3	B - Current	20 → 37	0
3	2L	2R	0	50	10	3	B - Current	37 → 40	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	3	B - Current	35 → 31	0
2	14L	14R	3	50	14	3	B - Current	31 → 25	1,950
3	13L	13R	2	50	14	3	B - Current	25 → 21	1,500
4	8L	9R	2	50	14	3	A - Navigate	21 → 17	2,400
5	6L	8R	2	50	14	3	A - Navigate	17 → 13	2,700
6	2L	6R	2	50	14	3	A - Navigate	13 → 9	3,300
7	2L	2R	1	50	14	3	A - Navigate	9 → 7	1,850
8	2L	2R	0	50	10	3	A - Navigate	7 → 0	0

THIS PATTERN IS DESIGNED FOR:

DUAL CONDITIONING TANKS | REVERSE DROP BRUSH

This pattern may require adjustments if using a lane machine that does not have these features



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

