




2025 U.S. WOMEN'S OPEN (PATTERN #1)



DISTANCE:	44 FEET	VOLUME:	30.43 mL
RATIO:	2.09:1	FORWARD:	22.03 mL
DROP BRUSH:	39 FEET	REVERSE:	8.4 mL
TANKS:	FIRE & ICE	PUMP:	MULTI

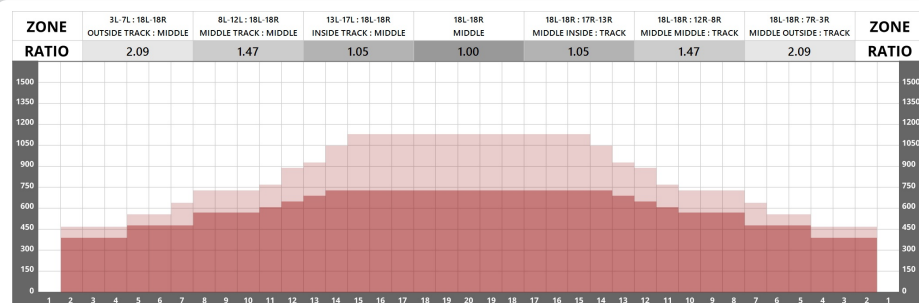

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	1	50	18	3	A - FIRE	0 → 0	1,850
2	5L	5R	2	45	18	3	A - FIRE	0 → 5	2,790
3	8L	8R	2	45	18	3	A - FIRE	5 → 10	2,250
4	2L	2R	4	55	18	3	A - FIRE	10 → 20	8,140
5	2L	2R	3	40	18	3	A - FIRE	20 → 28	4,440
6	11L	11R	1	40	18	3	A - FIRE	28 → 30	760
7	12L	12R	1	40	18	3	A - FIRE	30 → 33	680
8	13L	13R	1	40	18	3	A - FIRE	33 → 35	600
9	14L	14R	1	40	18	3	A - FIRE	35 → 38	520
10	2L	2R	0	45	18	3	A - FIRE	38 → 40	0
11	2L	2R	0	45	22	2	A - FIRE	40 → 42	0
12	2L	2R	0	45	26	1	A - FIRE	42 → 44	0

REVERSE LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	40	26	1	B - ICE	39 → 38	0
2	2L	2R	0	40	26	2	B - ICE	38 → 36	0
3	2L	2R	0	40	26	3	B - ICE	36 → 35	0
4	15L	15R	2	40	22	3	B - ICE	35 → 29	880
5	14L	14R	2	40	22	3	B - ICE	29 → 23	1,040
6	12L	12R	2	40	18	3	B - ICE	23 → 18	1,360
7	7L	7R	2	40	18	3	B - ICE	18 → 13	2,160
8	2L	2R	2	40	18	3	B - ICE	13 → 8	2,960
9	2L	2R	0	40	14	3	B - ICE	8 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features



Created Jun 13, 2025

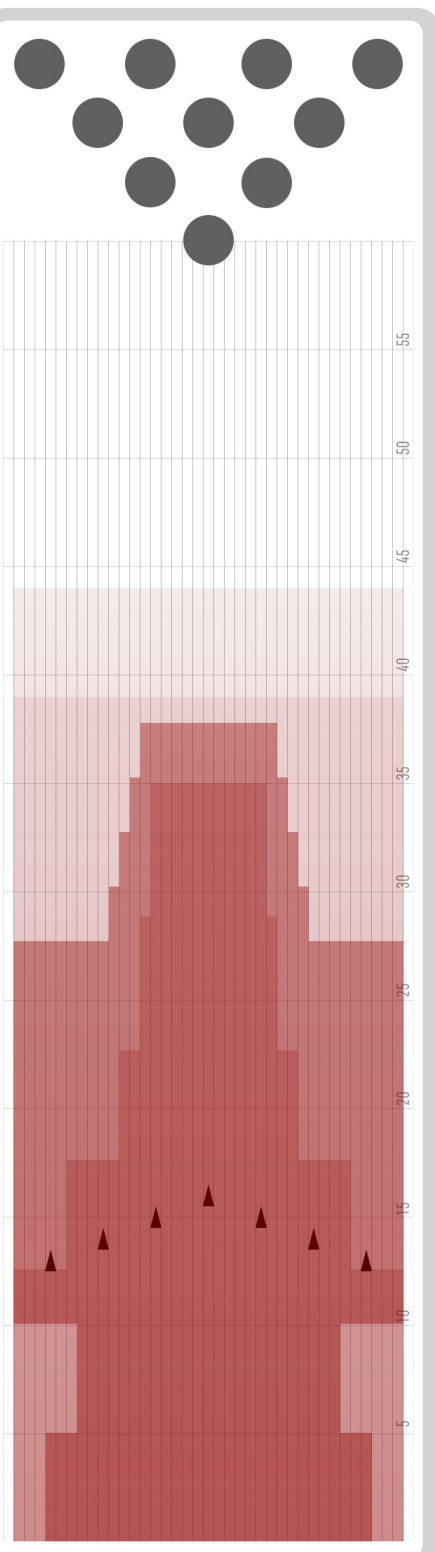

SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

