


DISTANCE:	40 FEET	VOLUME:	31.42 mL
RATIO:	2.04:1	FORWARD:	19.98 mL
DROP BRUSH:	34 FEET	REVERSE:	11.44 mL
TANKS:	FIRE & ICE	PUMP:	MULTI

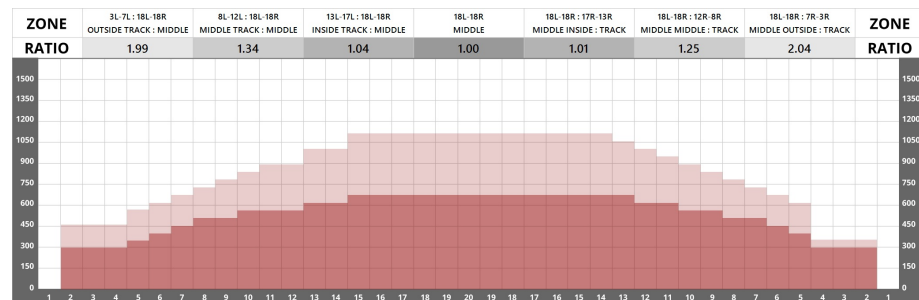

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	6	50	18	3	A - FIRE	0 → 13	11,100
2	5L	5R	1	50	18	3	A - FIRE	13 → 15	1,550
3	6L	5R	1	50	18	3	A - FIRE	15 → 18	1,500
4	7L	6R	1	55	18	3	A - FIRE	18 → 20	1,540
5	8L	7R	1	55	18	3	A - FIRE	20 → 23	1,430
6	10L	9R	1	55	18	3	A - FIRE	23 → 25	1,210
7	13L	11R	1	55	18	3	A - FIRE	25 → 28	935
8	15L	13R	1	55	18	3	A - FIRE	28 → 30	715
9	2L	2R	0	50	18	3	A - FIRE	30 → 34	0
10	2L	2R	0	50	22	2	A - FIRE	34 → 37	0
11	2L	2R	0	50	26	1	A - FIRE	37 → 40	0

REVERSE LOADS DATA



#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	3	B - ICE	34 → 26	0
2	15L	14R	1	55	26	3	B - ICE	26 → 22	660
3	13L	12R	1	55	22	3	B - ICE	22 → 19	880
4	11L	10R	1	55	18	3	B - ICE	19 → 17	1,100
5	9L	8R	1	55	18	3	B - ICE	17 → 14	1,320
6	5L	5R	1	55	14	3	B - ICE	14 → 12	1,705
7	2L	5R	2	55	14	3	B - ICE	12 → 8	3,740
8	2L	2R	1	55	14	3	B - ICE	8 → 6	2,035
9	2L	2R	0	55	14	3	B - ICE	6 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features



Created Jan 01, 2017

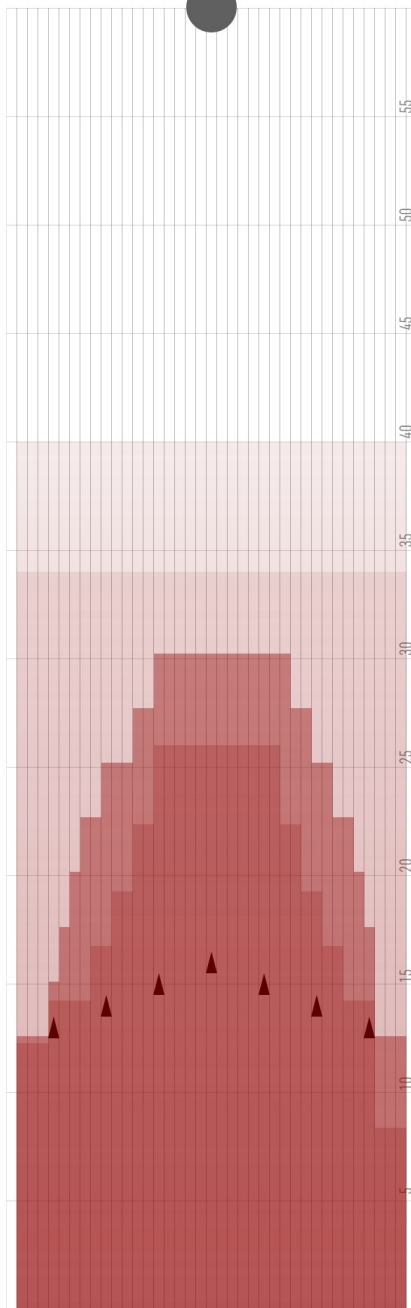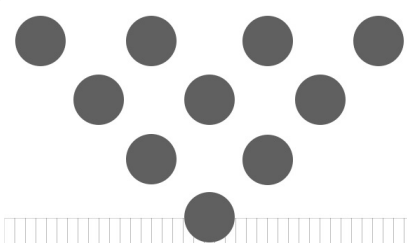

SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

