




# 2026 NCAA BOWLING CHAMPIONSHIP



|             |                 |          |          |
|-------------|-----------------|----------|----------|
| DISTANCE:   | 43 FEET         | VOLUME:  | 30.01 mL |
| RATIO:      | 2.37:1          | FORWARD: | 12.11 mL |
| DROP BRUSH: | 37 FEET         | REVERSE: | 17.9 mL  |
| TANKS:      | TERRAIN & GLIDE | PUMP:    | MULTI    |

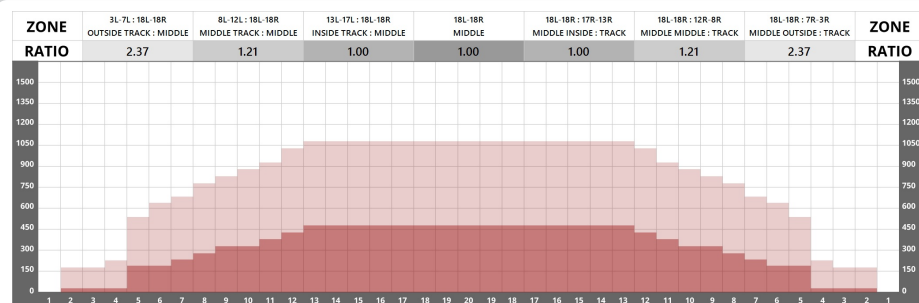

## FORWARD LOADS DATA

| #  | START | STOP | LOADS | MICS | SPEED | BUFF | TANK        | DISTANCE | T.OIL |
|----|-------|------|-------|------|-------|------|-------------|----------|-------|
| 1  | 2L    | 2R   | 1     | 30   | 18    | 500  | A - TERRAIN | 0 → 0    | 1,110 |
| 2  | 5L    | 5R   | 4     | 40   | 18    | 500  | A - TERRAIN | 0 → 10   | 4,960 |
| 3  | 7L    | 7R   | 1     | 45   | 18    | 500  | A - TERRAIN | 10 → 13  | 1,215 |
| 4  | 8L    | 8R   | 1     | 45   | 18    | 500  | A - TERRAIN | 13 → 15  | 1,125 |
| 5  | 9L    | 9R   | 1     | 50   | 18    | 500  | A - TERRAIN | 15 → 18  | 1,150 |
| 6  | 11L   | 11R  | 1     | 50   | 18    | 500  | B - GLIDE   | 18 → 20  | 950   |
| 7  | 12L   | 12R  | 1     | 50   | 18    | 500  | B - GLIDE   | 20 → 23  | 850   |
| 8  | 13L   | 13R  | 1     | 50   | 18    | 500  | B - GLIDE   | 23 → 25  | 750   |
| 9  | 2L    | 2R   | 0     | 50   | 18    | 500  | B - GLIDE   | 25 → 36  | 0     |
| 10 | 2L    | 2R   | 0     | 50   | 22    | 300  | B - GLIDE   | 36 → 39  | 0     |
| 11 | 2L    | 2R   | 0     | 50   | 22    | 100  | B - GLIDE   | 39 → 43  | 0     |

## REVERSE LOADS DATA


| # | START | STOP | LOADS | MICS | SPEED | BUFF | TANK      | DISTANCE | T.OIL |
|---|-------|------|-------|------|-------|------|-----------|----------|-------|
| 1 | 2L    | 2R   | 0     | 50   | 26    | 500  | B - GLIDE | 37 → 36  | 0     |
| 2 | 12L   | 12R  | 1     | 50   | 18    | 500  | B - GLIDE | 36 → 33  | 850   |
| 3 | 10L   | 10R  | 1     | 50   | 18    | 500  | B - GLIDE | 33 → 31  | 1,050 |
| 4 | 8L    | 8R   | 1     | 50   | 18    | 500  | B - GLIDE | 31 → 28  | 1,250 |
| 5 | 6L    | 6R   | 2     | 50   | 18    | 500  | B - GLIDE | 28 → 23  | 2,900 |
| 6 | 5L    | 5R   | 3     | 50   | 18    | 500  | B - GLIDE | 23 → 16  | 4,650 |
| 7 | 4L    | 4R   | 1     | 50   | 18    | 500  | B - GLIDE | 16 → 13  | 1,650 |
| 8 | 2L    | 2R   | 3     | 50   | 18    | 500  | B - GLIDE | 13 → 6   | 5,550 |
| 9 | 2L    | 2R   | 0     | 50   | 14    | 500  | B - GLIDE | 6 → 0    | 0     |

## THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH  
This pattern may require adjustments if using a lane machine that does not have these features



Created Apr 09, 2026

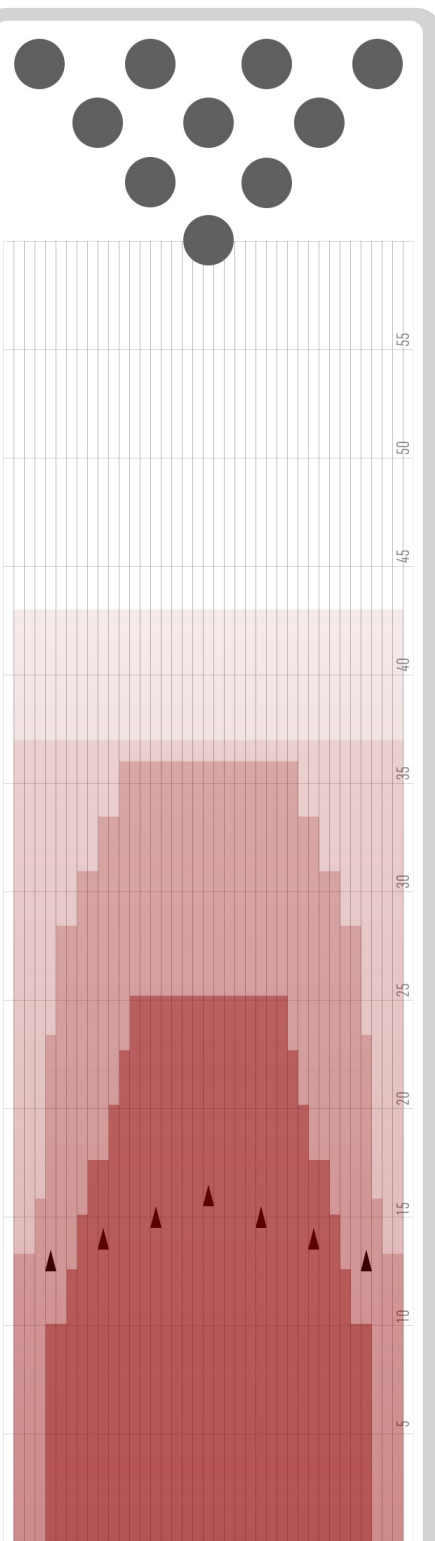

SCAN QR CODE TO  
SHARE AND  
DOWNLOAD  
THIS PATTERN

