




2026 USBC U22 MASTERS



DISTANCE:	44 FEET	VOLUME:	33.12 mL
RATIO:	2.69:1	FORWARD:	21.15 mL
DROP BRUSH:	39 FEET	REVERSE:	11.97 mL
TANKS:	CURVE & GLIDE	PUMP:	MULTI

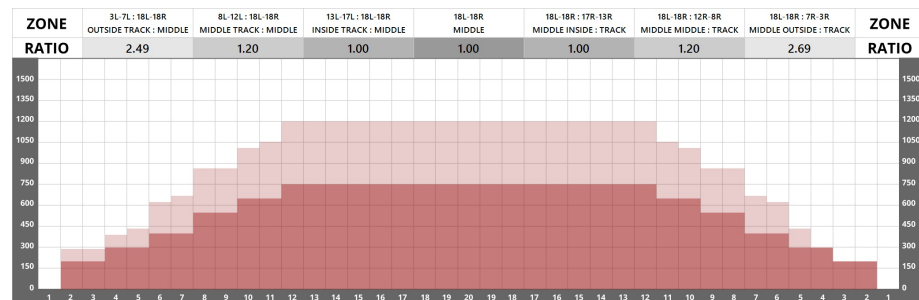

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	2	50	14	500	A & B - CURVE & GLIDE	0 → 2	7,400
2	4L	4R	2	50	14	500	A - CURVE	2 → 6	3,300
3	6L	6R	2	50	18	500	A - CURVE	6 → 11	2,900
4	8L	8R	3	50	18	500	B - GLIDE	11 → 18	3,750
5	10L	10R	2	50	18	500	B - GLIDE	18 → 24	2,100
6	12L	12R	2	50	18	500	B - GLIDE	24 → 29	1,700
7	2L	2R	0	50	18	500	A - CURVE	29 → 35	0
8	2L	2R	0	50	22	350	A - CURVE	35 → 39	0
9	2L	2R	0	50	22	150	A - CURVE	39 → 44	0


REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	45	30	500	B - GLIDE	39 → 28	0
2	12L	12R	1	45	18	500	B - GLIDE	28 → 25	765
3	11L	11R	1	45	18	500	B - GLIDE	25 → 23	855
4	10L	10R	1	45	18	500	B - GLIDE	23 → 20	945
5	8L	8R	1	45	18	500	B - GLIDE	20 → 18	1,125
6	7L	7R	1	45	14	500	B - GLIDE	18 → 16	1,215
7	6L	6R	2	45	14	500	A - CURVE	16 → 12	2,610
8	5L	5R	1	45	14	500	A - CURVE	12 → 10	1,395
9	2L	5R	2	45	14	500	A - CURVE	10 → 6	3,060
10	2L	2R	0	45	10	500	B - GLIDE	6 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created May 22, 2026

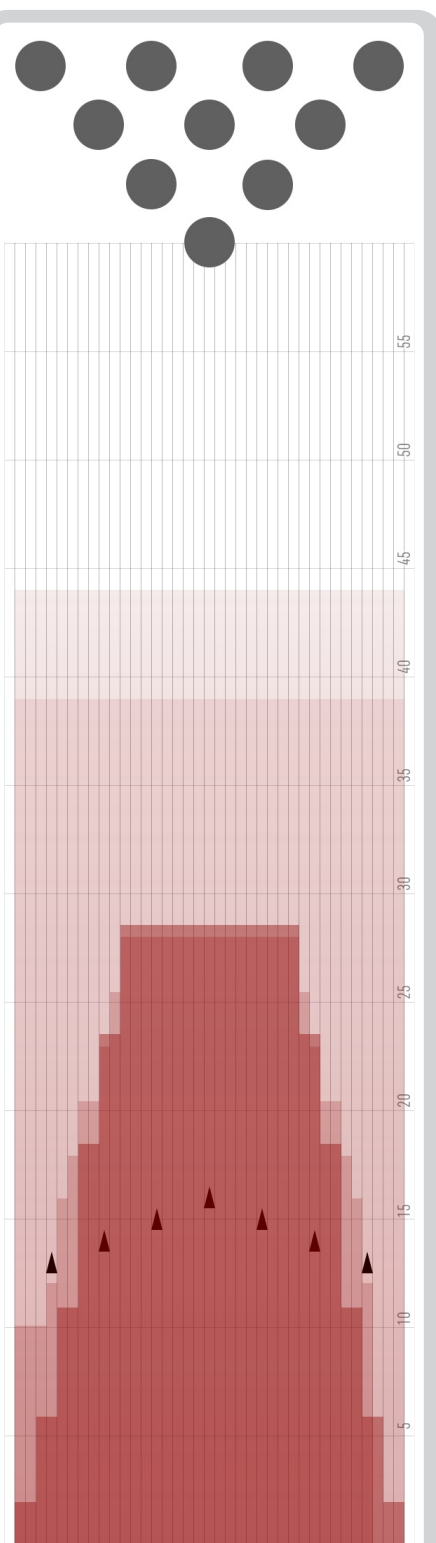

SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET