


DISTANCE:	39 FEET	VOLUME:	26.9 mL
RATIO:	2.10:1	FORWARD:	15.82 mL
DROP BRUSH:	35 FEET	REVERSE:	11.08 mL
TANKS:	FIRE & FIRE	PUMP:	MULTI

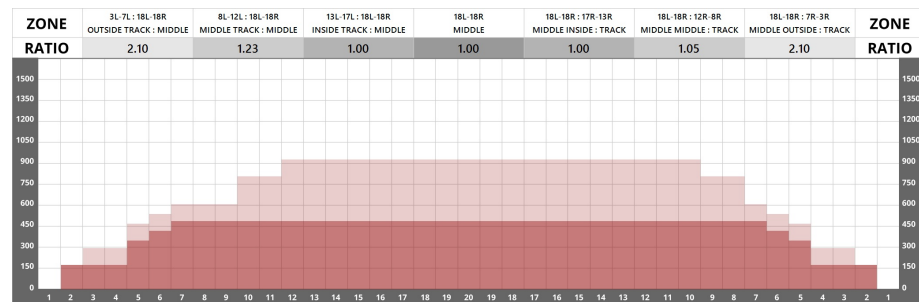

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	5	35	10	3	A - Fire	0 → 6	6,475
2	5L	5R	5	35	14	3	A - Fire	6 → 15	5,425
3	6L	6R	2	35	18	3	A - Fire	15 → 20	2,030
4	7L	7R	2	35	18	3	A - Fire	20 → 25	1,890
5	2L	2R	0	35	18	3	A - Fire	25 → 39	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	12L	10R	3	40	18	3	B - Fire	35 → 27	2,280
2	10L	8R	5	40	18	3	B - Fire	27 → 15	4,600
3	3L	3R	3	40	14	3	B - Fire	15 → 9	4,200
4	2L	2R	0	40	14	3	B - Fire	9 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

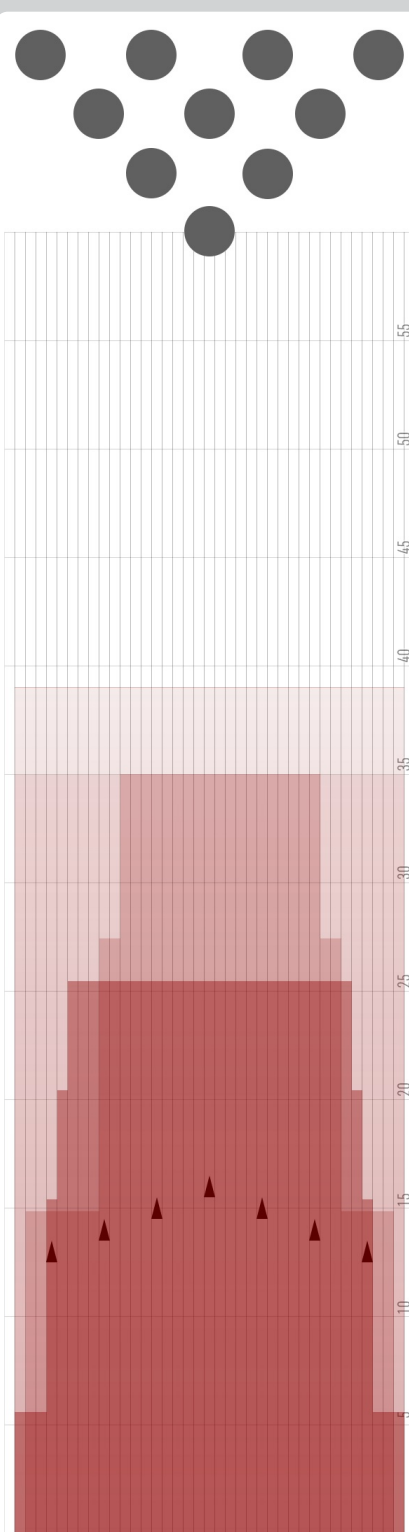

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

