




NBF 243824



DISTANCE:	38 FEET	VOLUME:	24 mL
RATIO:	2.39:1	FORWARD:	16.08 mL
DROP BRUSH:	35 FEET	REVERSE:	7.92 mL
TANKS:	KEGEL & KEGEL	PUMP:	40µL

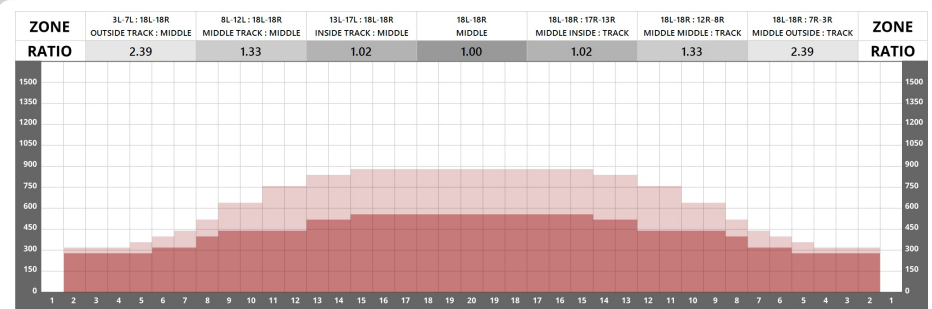

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	7	40	18	4	A - KEGEL	0 → 15	10,360
2	6L	6R	1	40	18	3	A - KEGEL	15 → 18	1,160
3	8L	8R	2	40	18	3	A - KEGEL	18 → 23	2,000
4	9L	9R	1	40	18	3	A - KEGEL	23 → 25	920
5	13L	13R	2	40	18	3	A - KEGEL	25 → 30	1,200
6	15L	15R	1	40	18	3	A - KEGEL	30 → 33	440
7	2L	2R	0	40	22	3	A - KEGEL	33 → 38	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	40	30	3	B - KEGEL	35 → 24	0
2	11L	11R	3	40	22	3	B - KEGEL	24 → 15	2,280
3	9L	9R	2	40	22	3	B - KEGEL	15 → 9	1,840
4	7L	7R	1	40	18	4	B - KEGEL	9 → 6	1,080
5	5L	5R	1	40	18	4	B - KEGEL	6 → 4	1,240
6	2L	2R	1	40	14	4	B - KEGEL	4 → 2	1,480
7	2L	2R	0	40	14	4	B - KEGEL	2 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
 This pattern may require adjustments if using a lane machine that does not have these features

Created May 17, 2024



KEGEL PATTERN LIBRARY APP



[PATTERNLIBRARY.KEGEL.NET](https://patternlibrary.kegel.net)



SCAN QR CODE TO
 SHARE AND
 DOWNLOAD
 THIS PATTERN

