


DISTANCE:	44 FEET	VOLUME:	26.4 mL
RATIO:	2.21:1	FORWARD:	17.32 mL
DROP BRUSH:	40 FEET	REVERSE:	9.08 mL
TANKS:	FIRE & FIRE	PUMP:	40μL

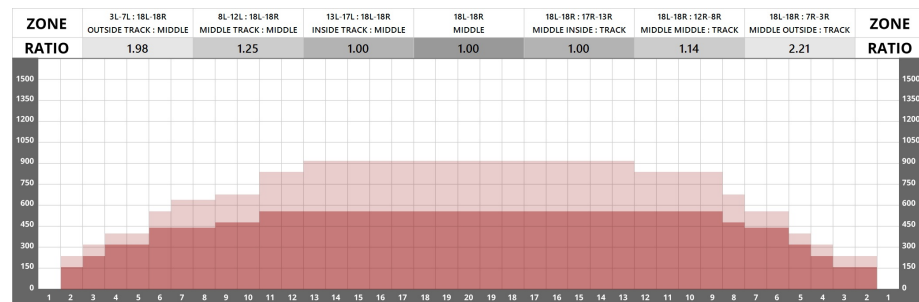

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	4	40	14	3	A - Fire	0 → 6	5,920
2	3L	4R	2	40	14	3	A - Fire	6 → 10	2,720
3	4L	5R	2	40	14	3	A - Fire	10 → 14	2,560
4	6L	6R	3	40	18	3	A - Fire	14 → 21	3,480
5	9L	8R	1	40	18	3	A - Fire	21 → 24	960
6	11L	9R	2	40	18	3	A - Fire	24 → 29	1,680
7	2L	2R	0	40	22	2	A - Fire	29 → 40	0
8	2L	2R	0	40	22	1	A - Fire	40 → 44	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	40	18	3	B - Fire	40 → 28	0
2	13L	13R	2	40	18	3	B - Fire	28 → 23	1,200
3	11L	9R	2	40	18	3	B - Fire	23 → 18	1,680
4	7L	8R	2	40	14	3	B - Fire	18 → 14	2,080
5	6L	6R	1	40	14	3	B - Fire	14 → 12	1,160
6	2L	2R	2	40	14	3	B - Fire	12 → 8	2,960
7	2L	2R	0	40	14	3	B - Fire	8 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

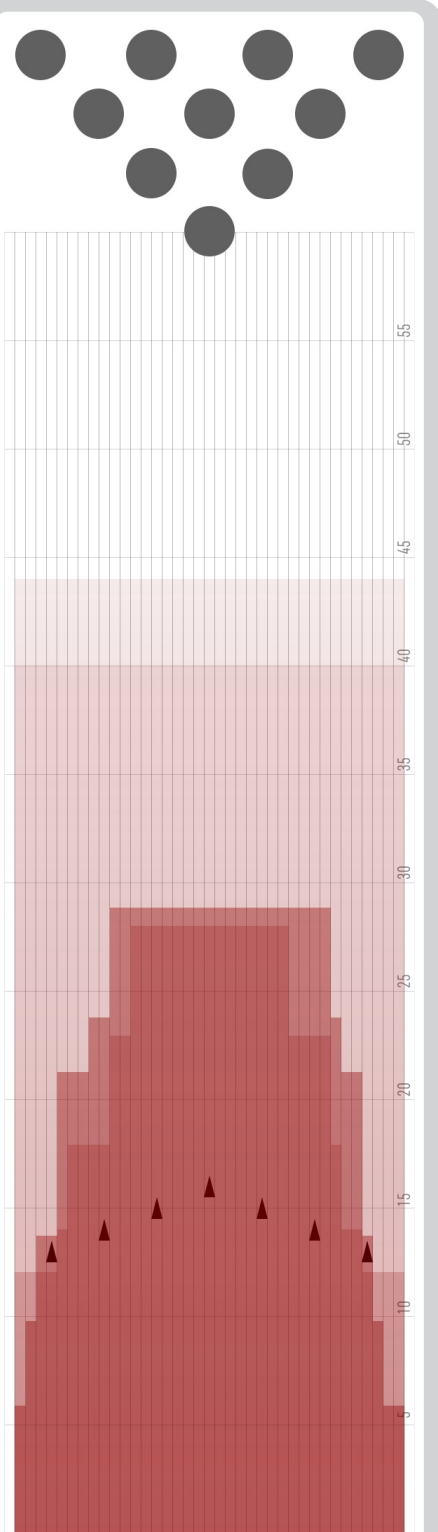

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

