




2026 U.S. OPEN (PATTERN 4)



DISTANCE:	43 FEET	VOLUME:	33.364 mL
RATIO:	1.73:1	FORWARD:	24.614 mL
DROP BRUSH:	39 FEET	REVERSE:	8.75 mL
TANKS:	CURVE & GLIDE	PUMP:	MULTI

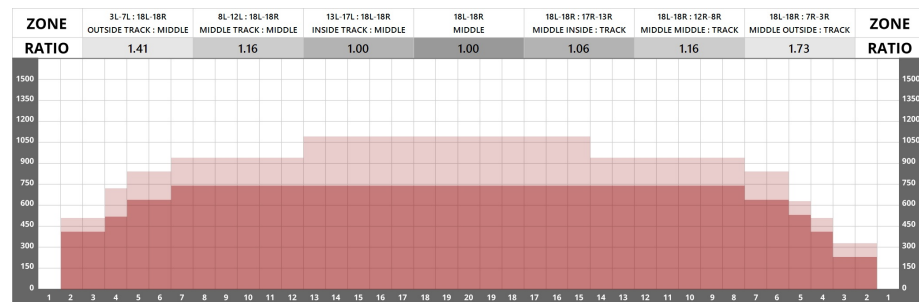

FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	4	48	18	3	A - CURVE	0 → 8	7,104
2	2L	4R	4	45	18	3	B - GLIDE	8 → 18	6,300
3	4L	6R	2	55	10	3	B - GLIDE	18 → 20	3,410
4	7L	8R	2	50	18	3	B - GLIDE	20 → 25	2,600
5	2L	2R	1	40	18	3	A - CURVE	25 → 28	1,480
6	5L	5R	3	40	22	3	B - GLIDE	28 → 37	3,720
7	2L	2R	0	50	10	3	A - CURVE	37 → 43	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	50	30	3	B - GLIDE	39 → 36	0
2	13L	15R	3	50	30	3	B - GLIDE	36 → 23	1,950
3	4L	6R	2	50	30	3	B - GLIDE	23 → 15	3,100
4	2L	2R	2	50	30	3	A - CURVE	15 → 7	3,700
5	2L	2R	0	50	10	3	A - CURVE	7 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

Created Mar 05, 2026



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

