




# 2016 EBT KEGEL AALBORG INTERNATIONAL



<b>DISTANCE:</b>	<b>42 FEET</b>	<b>VOLUME:</b>	<b>26.615 mL</b>
<b>RATIO:</b>	<b>2.59:1</b>	<b>FORWARD:</b>	<b>17.23 mL</b>
<b>DROP BRUSH:</b>	<b>36 FEET</b>	<b>REVERSE:</b>	<b>9.385 mL</b>
<b>TANKS:</b>	<b>FIRE &amp; ICE</b>	<b>PUMP:</b>	<b>MULTI</b>

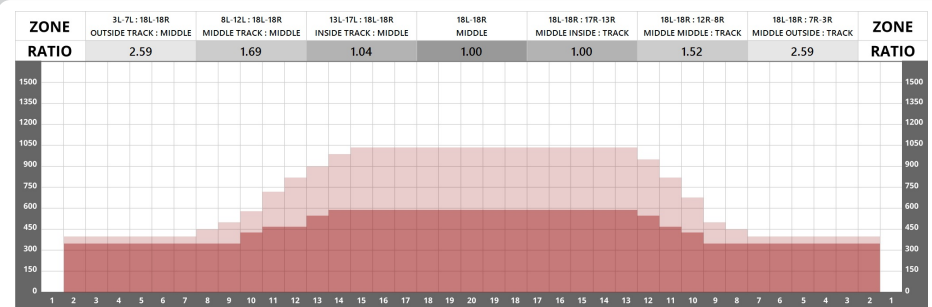

## FORWARD LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	7	50	14	3	A - FIRE	0 → 12	12,950
2	10L	10R	2	40	14	3	A - FIRE	12 → 16	1,680
3	11L	11R	1	40	18	3	A - FIRE	16 → 18	760
4	13L	12R	2	40	18	3	A - FIRE	18 → 23	1,280
5	14L	13R	1	40	18	3	A - FIRE	23 → 26	560
6	2L	2R	0	40	22	3	A - FIRE	26 → 35	0
7	2L	2R	0	40	30	2	A - FIRE	35 → 42	0

## REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	45	30	1	B - ICE	36 → 30	0
2	15L	13R	1	45	22	3	B - ICE	30 → 27	585
3	14L	12R	1	50	22	3	B - ICE	27 → 24	750
4	12L	11R	2	50	18	3	B - ICE	24 → 19	1,800
5	11L	10R	2	50	18	3	B - ICE	19 → 14	2,000
6	9L	9R	1	50	18	4	B - ICE	14 → 11	1,150
7	8L	8R	1	50	18	4	B - ICE	11 → 9	1,250
8	2L	2R	1	50	14	4	B - ICE	9 → 7	1,850
9	2L	2R	0	50	14	4	B - ICE	7 → 0	0

### THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH  
 This pattern may require adjustments if using a lane machine that does not have these features



KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO  
SHARE AND  
DOWNLOAD  
THIS PATTERN

