


DISTANCE:	41 FEET	VOLUME:	27.78 mL
RATIO:	2.55:1	FORWARD:	21.3 mL
DROP BRUSH:	36 FEET	REVERSE:	6.48 mL
TANKS:	FIRE & FIRE	PUMP:	MULTI

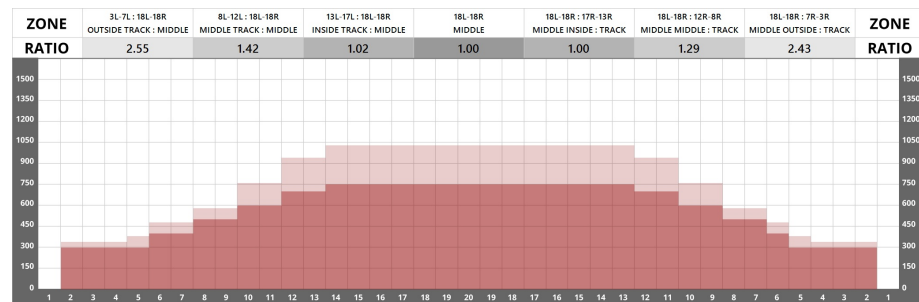

FORWARD LOADS DATA


#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	6	50	14	3	A - FIRE	0 → 10	11,100
2	6L	6R	2	50	18	3	A - FIRE	10 → 15	2,900
3	8L	7R	2	50	18	3	A - FIRE	15 → 20	2,600
4	10L	9R	2	50	18	3	A - FIRE	20 → 25	2,200
5	12L	11R	2	50	18	3	A - FIRE	25 → 30	1,800
6	14L	13R	1	50	18	3	A - FIRE	30 → 32	700
7	2L	2R	0	50	22	3	A - FIRE	32 → 37	0
8	2L	2R	0	45	26	3	A - FIRE	37 → 41	0

REVERSE LOADS DATA

#	START	STOP	LOADS	MICS	SPEED	BUFF	TANK	DISTANCE	T.OIL
1	2L	2R	0	40	30	3	B - FIRE	36 → 24	0
2	14L	13R	1	40	18	3	B - FIRE	24 → 21	560
3	12L	11R	2	40	18	3	B - FIRE	21 → 16	1,440
4	10L	9R	2	40	18	4	B - FIRE	16 → 11	1,760
5	5L	5R	1	40	18	4	B - FIRE	11 → 9	1,240
6	2L	2R	1	40	18	4	B - FIRE	9 → 6	1,480
7	2L	2R	0	40	14	4	B - FIRE	6 → 0	0

THIS PATTERN IS DESIGNED FOR:

VARIABLE BUFFER SPEEDS | VARIABLE MICROLITER STREAMS | DUAL CONDITIONING TANKS | REVERSE DROP BRUSH
This pattern may require adjustments if using a lane machine that does not have these features

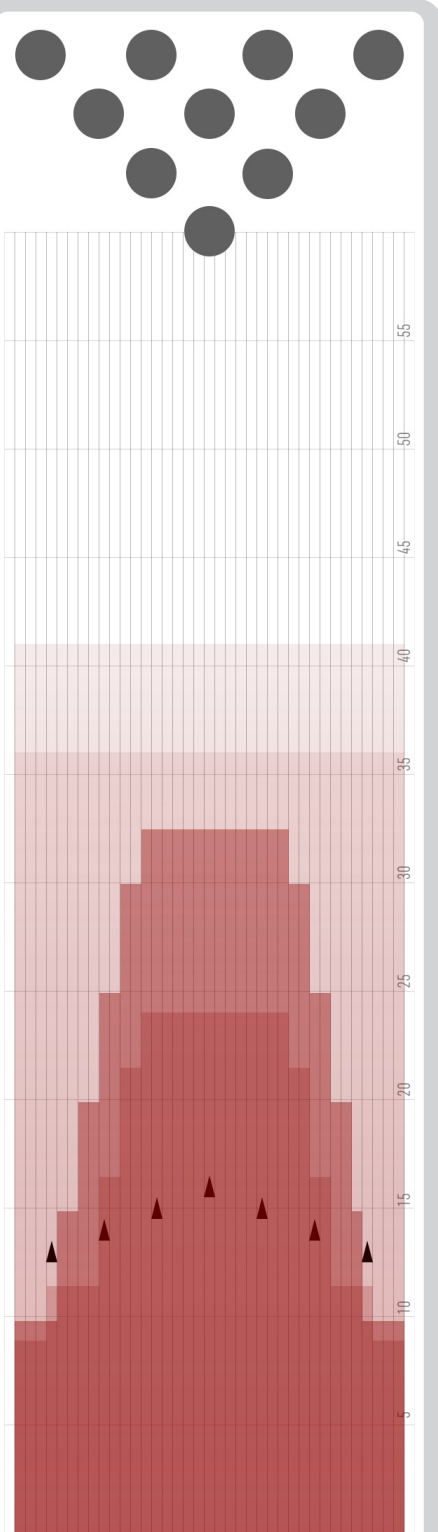

KEGEL PATTERN LIBRARY APP



PATTERNLIBRARY.KEGEL.NET



SCAN QR CODE TO
SHARE AND
DOWNLOAD
THIS PATTERN

